

Battery Management System for Hybrid Photovoltaic and Wind Power System using Fuzzy Logic Controller

M. Venkateshkumar* and R. Raghavan*

ABSTRACT

In recent year, the development of hybrid renewable energy sources has the important role of power generation. This paper focused on design of hybrid PV / Wind power system and its battery management system. The fuzzy logic control based battery management system has been designed for effective power utilization. The proposed control to operate the battery charging and discharging mode during non-linear power generation. The battery will charge whenever the renewable energy power is greater than to consumer load power as well as the battery will discharge whenever the renewable energy power is lesser than to consumer load power. The proposed model will be simulated using Matlab environment and analysis the proposed system results. Finally, simulation results are evaluated and validating the effectiveness of the proposed controller.

Key words : Hybrid Renewable Energy, Photovoltaic, Wind, Fuzzy, Battery management system

1. INTRODUCTION

In recent years the renewable power generations have an importance role to meet the consumer demand. The hybrid renewable energy sources are very effective to generate the power even though the absence of any one source [1]. In this paper, we have to select two different renewable energy sources such as PV and Wind power system. The PV sources, it's generating the maximum power at during day time. The wind energy system has generated the maximum power at during night time. This paper has analyzed the operation of individual and hybrid PV/ Wind system. The section II presents the operation and model of PV system. The section III presents the operation and model of the wind system. The section IV presents the proposed system simulation model and results. The section V presents the results discussion. The section VI presents the conclusion of the proposed system.

2. PHOTOVOLTAIC SYSTEM

Photovoltaic cells are made up of semiconductor materials which are capable of converting light energy into electrical energy by the principle of the photovoltaic effect [2] [3]. The photons from sunlight provide the necessary energy for electrons in the semiconductor materials to cross the band gap to travel from one band to another. The movement of electrons from one band to another cause electron flows, thus producing the current [4]. The output voltage of a photovoltaic cell is directly dependent on the irradiance and temperature of sunlight. Open circuit output voltage can be calculated using the formula

$$V_{OC\ ambient} = \text{Temperature Coefficient} (T_{STC} - T_{ambient} + V_{oc\ rated}) \quad (1)$$

Where

$V_{OC\ ambient}$ = Open circuit voltage at module temperature

Temperature Coefficient = 0.12 V/C

* Ph.D Scholar Sathyabama University, Adviser E.G.S.P.Engg College, Nagapattinam, E-mail: venkatmme@gmail.com

(When the temperature decreases by one degree Celsius the voltage increases by 0.12)

T_{STC} [°C] =Temperature at Standard test conditions (25°C and 1000 W/m²)

$T_{ambient}$ [°C] =Module Temperature

$V_{OC rated}$ = Open Circuit voltage at standard test conditions

The voltage waveform of the single PV array MATLAB model (Fig..) At the temperature of 25°C and irradiance of 1000 W/m² is shown in the Fig. . From the output waveform it is clearly seen that the $V_{OC ambient}$ is 135 volts and the saturation time for the PV array to reach $V_{OC ambient}$ is 0.03secs

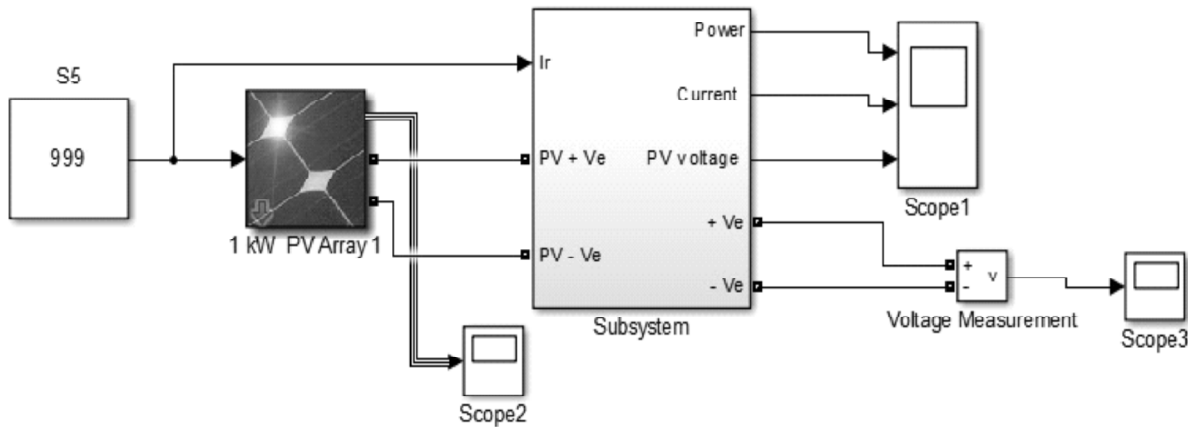


Figure 1: Simulation Model of single PV cell

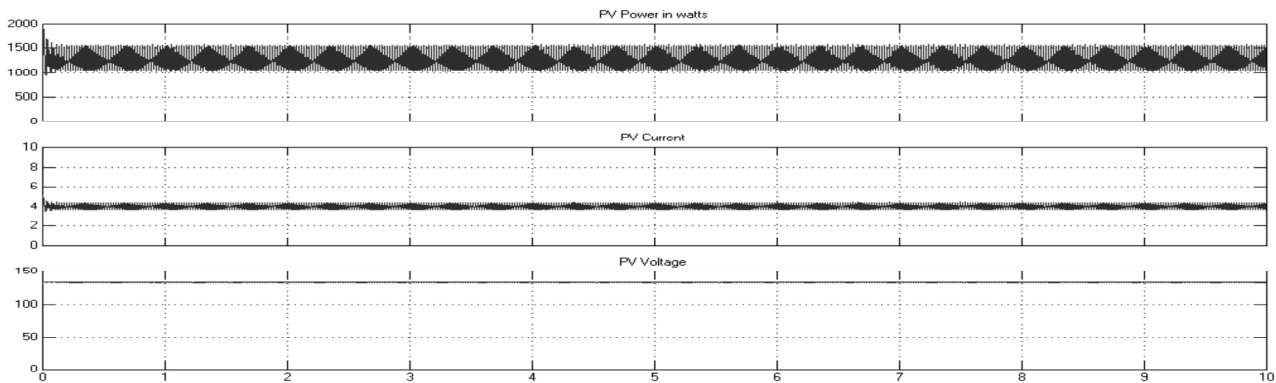


Figure 2: Output Voltage of PV Power system

3. WIND POWER SYSTEM

To utilize the non-conventional source of energy for generating power to meet our daily demand [5]. The source as a wind and converting its kinetic energy into electric energy. The system which has built is eco-friendly and does not cause any harm to the environment or to human beings. It is long term power implementation scheme and power can be generated continuously at any season condition [7] [8].

Conversion of kinetic energy of the wind into mechanical energy that can be utilized to perform useful work, or to generate electricity. The axis may be horizontal, or vertical.

Types of windmill

1. Horizontal axis and
2. Vertical axis.

As the speed of the turbine increase the synchronous generator rotates above the synchronous speed and act as an induction generator which converts the mechanical energy of turbine rotation into electrical energy which is to be supplied to the off-grid [7] [8].

With the advent of high powered Thyristor and high voltage DC systems, AC output of the 3-phase

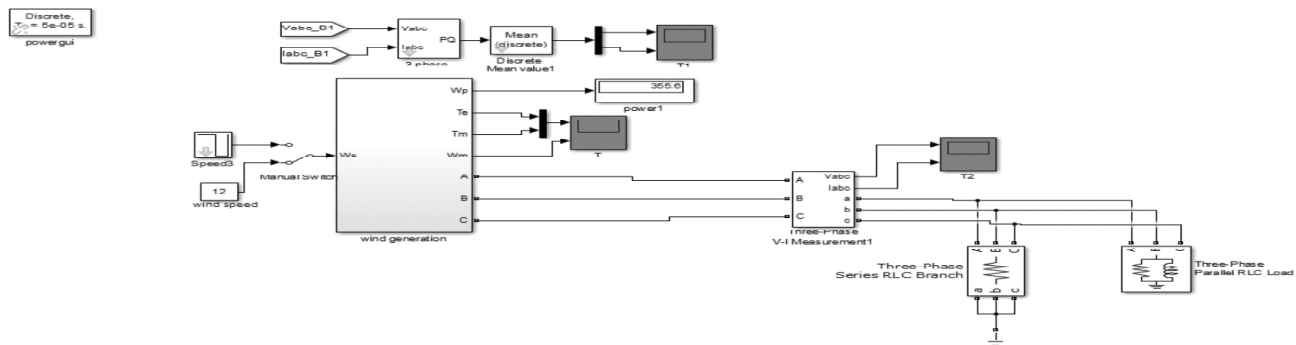


Figure 3: Wind power system

alternator is rectified by 3 phase rectifier circuit and then converted DC to AC using voltage source inverters. They utilize an AC source (power lines) which periodically reverses polarity and causes the commutation to occur naturally. Since frequency is robotically stable by the power line, they are also recognized as synchronous inverters. And the output from the windmill will be 3-phase AC supply, so it will be converted to DC by using the universal bridge. And it is stored directly to the battery as DC. It is shown in fig 4.

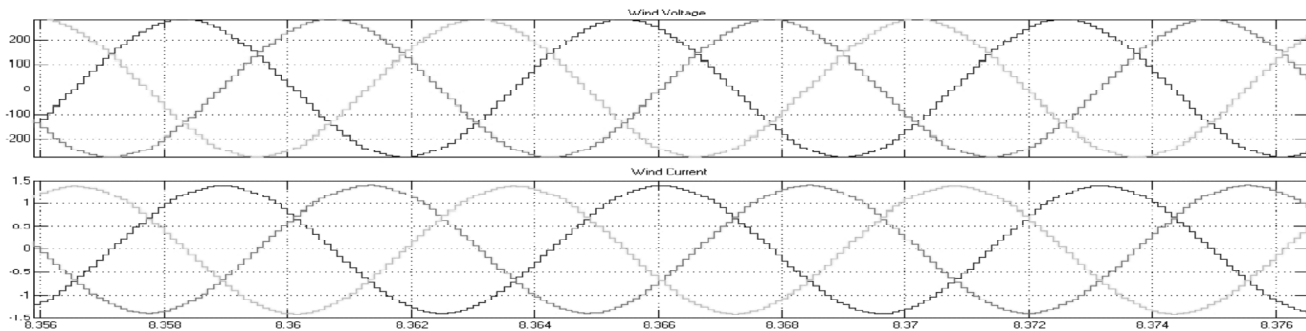


Figure 4: Wind power system output voltage

Block diagram

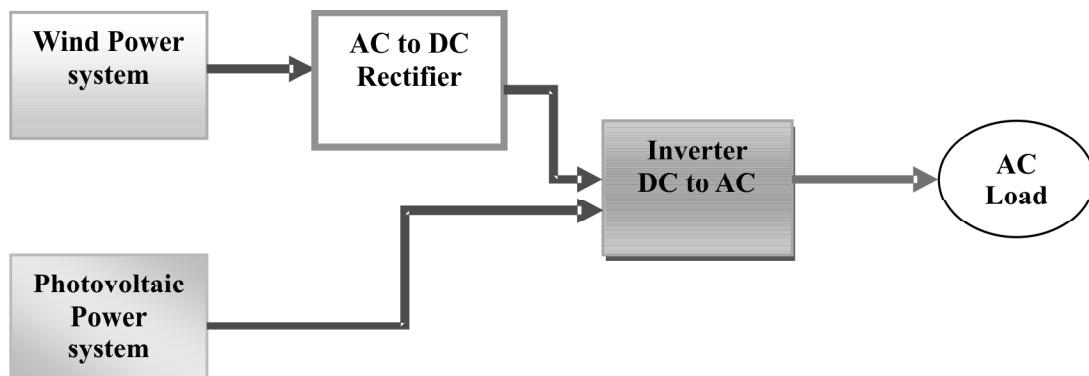


Figure 5: Proposed hybrid PV/ Wind power system

The proposed model has simulated used the Matlab environment as shown in fig. 6. The simulation model we have used Photovoltaic and wind power system and common inverter in a PV / wind system as shown in fig. 1 and fig. 3. The voltage controller circuit is always evaluating the Common connecting point voltage profile and compare with PV/Wind generation voltage on inverter side [9-13]. The fuzzy logic controller is developed using Matlab software. The fuzzy logic control will control the battery charging and discharging operation shown in fig. 7 and fig. 8. The proposed controller will operate the circuit breaker of battery charging mode and battery discharging mode shown in fig. 9. [14-16].

The hybrid PV and Wind power system are connected to load and the load voltage and load power are presented in fig 10 and 11.

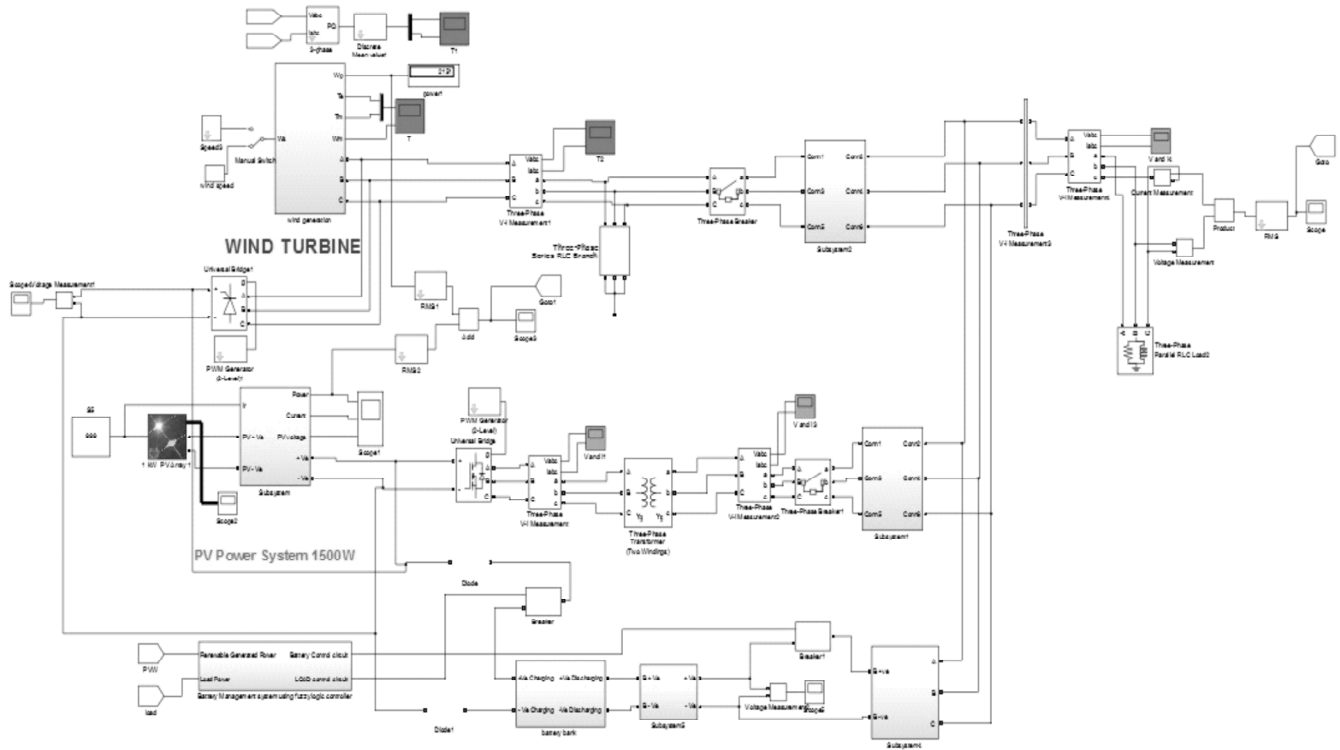


Figure 6: Hybrid PV / Wind Power system with Battery Management System

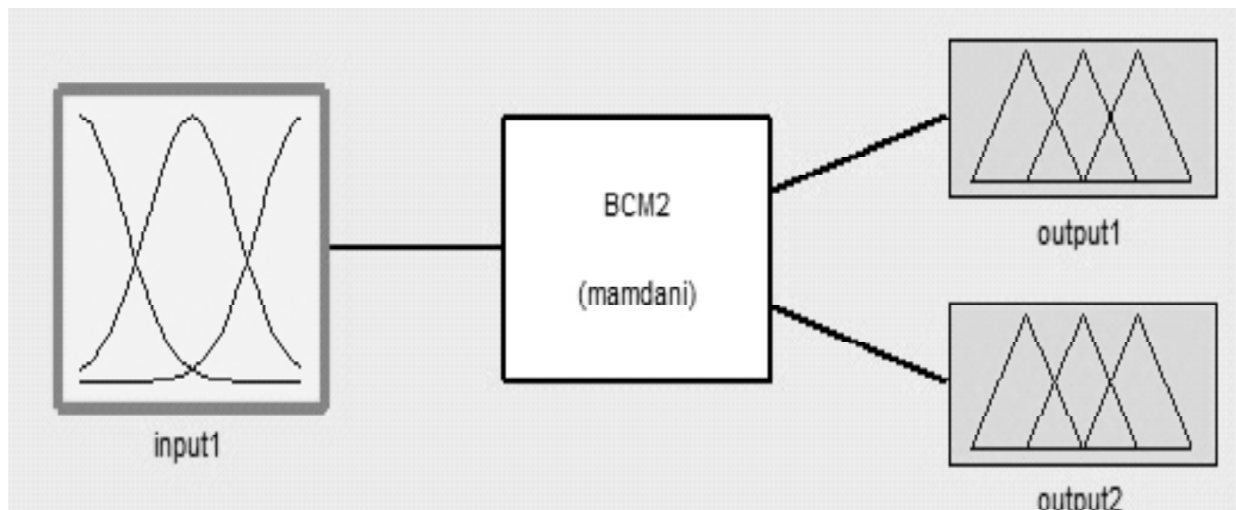


Figure 7: Fuzzy Control Design

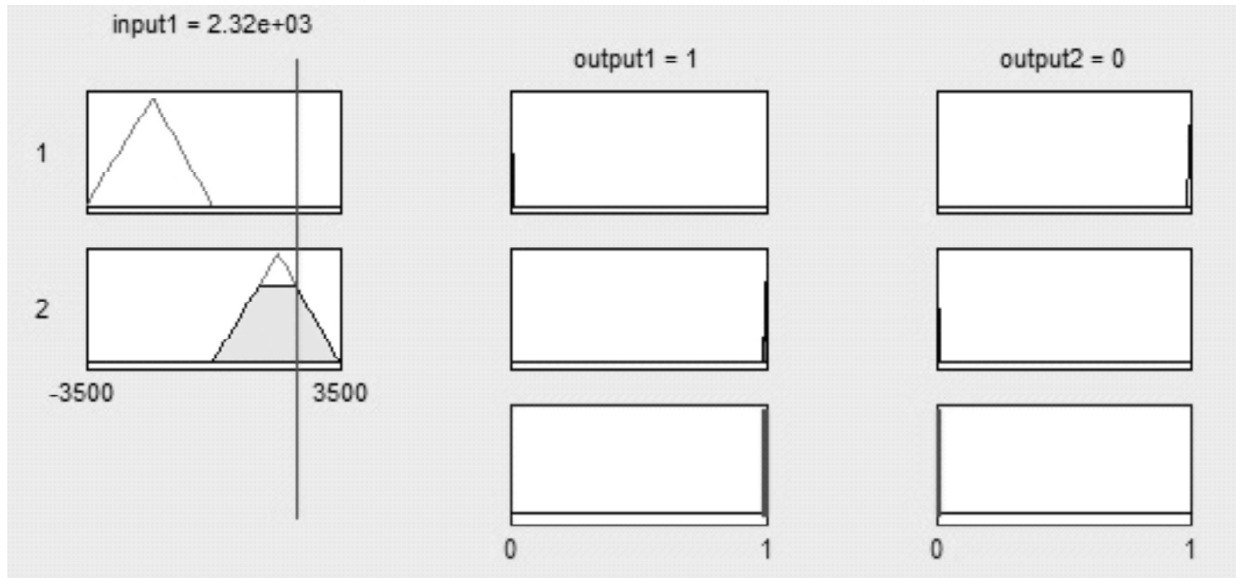


Figure 8: Fuzzy Rule

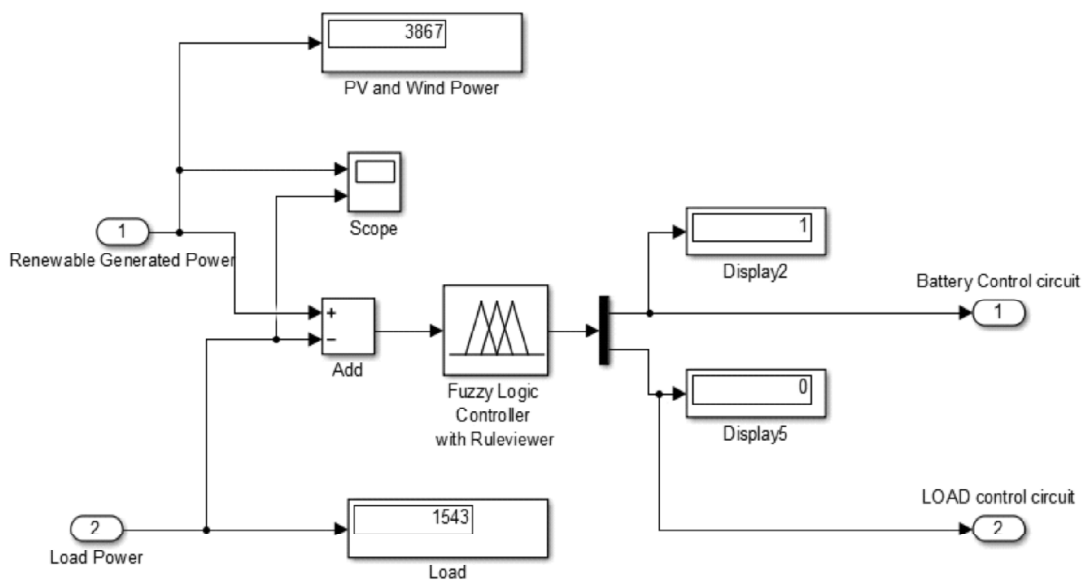


Figure 9: Fuzzy Controller Based Battery Management System

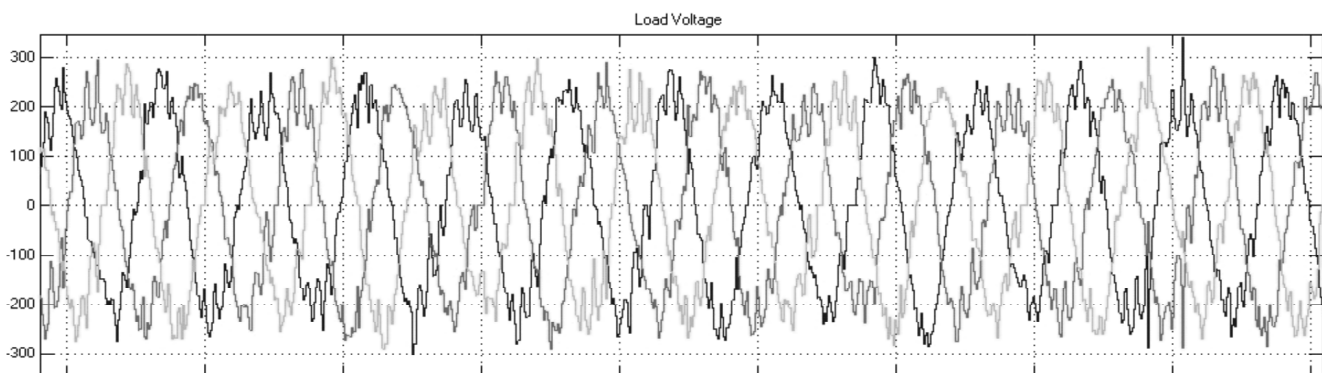


Figure 10: The hybrid PV/ Wind voltage profile

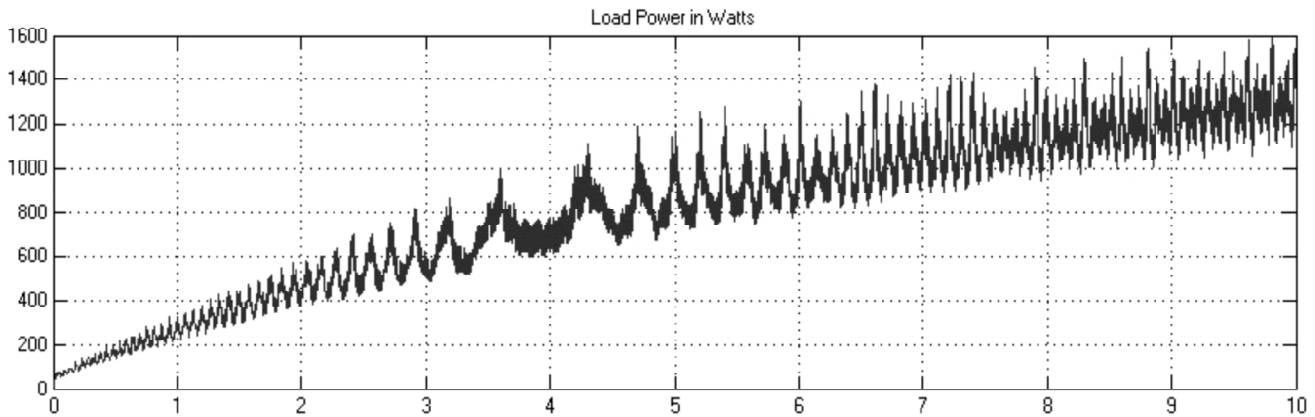


Figure 11: Full load power 1500Watts

4. CONCLUSION

This paper the 7.5 kW hybrid photovoltaic and wind power systems was simulated using Matlab Simulink environment. Effective power utilization of the above hybrid system battery management technology is developed by using the fuzzy logic controller and simulated in Matlab. The fuzzy logic controller to operate the two circuit breakers, such as battery charging mode and discharging mode. The battery charging mode circuit breaker is closed and discharging mode circuit breaker opened whenever the generation of renewable energy power is greater than consumer load. The battery discharging mode circuit breaker is closed and charging mode circuit breaker opened whenever the generation of renewable energy power is lesser than consumer load. The proposed model simulation results are evaluated and show the effectiveness of the controller.

REFERENCE

- [1] Amorndechaphon, D.; Premrudeepreechacharn, S.; Higuchi, K., "Grid-connected CSI for hybrid PV/wind power generation system," *SICE Annual Conference (SICE), 2011 Proceedings of*, vol., no., pp.727,732, 13-18 Sept. 2011.
- [2] Venkateshkumar, M.; Indumathi, R.; Poornima, P., "Photovoltaic cell power generation for stand-alone applications," *Advances in Engineering, Science and Management (ICAESM), 2012 International Conference on*, vol., no., pp.57,62, 30-31 March 2012.
- [3] Indumathi, R.; Venkateshkumar, M.; Raghavan, R., "Integration of D-Statcom based photovoltaic cell power in low voltage power distribution grid," *Advances in Engineering, Science and Management (ICAESM), 2012 International Conference on*, vol., no., pp. 460,465, 30-31 March 2012.
- [4] Chen Zhong; Hu Lvlong; Gao Shan; Lu Tingrui; Li Haifeng, "The research about PV/wind hybrid energy considering grid security constraints," *Innovative Smart Grid Technologies (ISGT), 2013 IEEE PES*, vol., no., pp.1,5, 24-27 Feb. 2013.
- [5] Abdelkarim, Emad; Aly, Mohamed M.; Abdel-Akher, Mamdouh; Leidhold, Roberto, "Control of Plug-in Hybrid Electric Vehicles as Smart Grid Support within PV/Wind Power Generations," *Telecommunications Energy Conference 'Smart Power and Efficiency' (INTELEC), Proceedings of 2013 35th International*, vol., no., pp.1,6, 13-17 Oct. 2013.
- [6] Hosseini, S.H.; Haghghighian, S.K.; Danyali, S.; Aghazadeh, H., "Multi-input dc boost converter supplied by a hybrid PV/ Wind turbine power systems for street lighting application connected to the grid," *UniversitiesPower Engineering Conference (UPEC), 2012 47th International*, vol., no., pp. 1,6, 4-7 Sept. 2012.
- [7] M.Venkateshkumar "Ac Grid Connected Photovoltaic Energy System Using 21-Level Multilevel Cascade H-Bridge Inverter" on *International Journal of Applied Engineering Research*, vol 10, no 4 pp 3837-3841 march 2015.
- [8] M.Venkateshkumar "Power Quality Improvement In Grid Connected Distributed System Using Facts Devices" on *International Journal of Applied Engineering Research*, vol 10, no 4 pp 3856-3860 march 2015.
- [9] M.Venkateshkumar "Intelligent Control Based MPPT For Grid Penetration Of Photovoltaic Power System" on *International Journal of Applied Engineering Research*, vol. 10, no. 4 pp 3865-3869 march 2015.
- [10] M.Venkateshkumar An Overview Of Maximum Power Point Tracking Techniques For Photovoltaic Power System " on *International Journal of Applied Engineering Research*, vol. 10, no 4 pp 3799-3803 march 2015.

-
- [11] Craciun, B.-I.; Kerekes, T.; Sera, D.; Teodorescu, R., "Overview of recent Grid Codes for PV power integration," *Optimization of Electrical and Electronic Equipment (OPTIM), 2012 13th International Conference on*, vol., no., pp. 959,965, 24-26 May 2012.
- [12] Solanki, S.K.; Ramachandran, V.; Solanki, J., "Steady state analysis of high penetration PV on utility distribution feeder," *Transmission and Distribution Conference and Exposition (T&D), 2012 IEEE PES*, vol., no., pp.1,6, 7-10 May 2012.
- [13] Mougharbel, I.; Shehab, Z.; Georges, S., "Simulation of a hybrid renewable energy system in rural regions," *IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society*, vol., no., pp.1150,1155, 25-28 Oct. 2012.
- [14] Yaosuo Xue; Manjrekar, M.; Chenxi Lin; Tamayo, M.; Jiang, J.N., "Voltage stability and sensitivity analysis of grid-connected photovoltaic systems," *Power and Energy Society General Meeting, 2011 IEEE*, vol., no., pp.1,7, 24-29 July 2011.
- [15] Gueïrin, F.; Lefebvre, D.; Mboup, AB.; Pareïdeï, J.; Lemains, E.; Ndiaye, P.A.S., "Hybrid Modeling for Performance Evaluation of Multisource Renewable Energy Systems," *Automation Science and Engineering, IEEE Transactions on*, vol.8, no. 3, pp.570,580, July 2011.
- [16] Anandhakumar, G.; Venkateshkumar, M.; Shankar, P. Fuzzy Logic Controller Based MPPT Method of the Photovoltaic Power System. *International Review of Automatic Control (IREACO)*, [S.l.], v. 7, n. 3, p. 240-244, may. 2014. ISSN 1974-6067.