Application of Parametric Methods for Earthquake Precursors using GPS TEC

R. Revathi^{*}, S. Lakshminarayana^{**}, K.S. Ramesh^{**} and S. Koteswara Rao^{**}

Abstract: Ionospheric Total Electron Content (TEC) perturbations observed for event happened on 15^{th} January 2014 in Indonesia with magnitude of M ~ 4.5 on Ritcher scale are investigated. The earthquake occurred at 9:26 hours Greenwich meantime (GMT). Yule-Walker, Covariance, Modified Covariance and Burg parametric methods are used to find out the change in the spectrum of signals with and without disturbances in the signal. From the analysis, it is observed that ionosphere was disturbed thrice due to the impending earthquake resulting in upraise of energy in the ionosphere at 10:13 hours LTC, 10:40 hours LTC and finally at 10:52 hours LTC, which is coinciding with that of the earthquake occurrence. These studies in future may help in developing early warning systems for earthquakes.

Keywords: Total electron content, Parametric methods, Earthquake.

1. INTRODUCTION

The analysis of electromagnetic perturbations, prior to the occurrence of the earthquake, has often been considered to be a promising tool for their short term prediction [1]. The seismogenic electromagnetic signals cover a wide range of frequencies from DC to VHF [4]. Even though the cause for the seismo-ionospheric perturbations are not yet clearly known, these disturbances have been established by many scientists statistically by removing the possible sources like solar flares, geomagnetic storm activity using running median values in Total Electron Content (TEC) [6].

Mechanical transformations with active geochemical processes are the most prevalent phenomena in the area of earthquake occurrence leading to the emanations of radon, noble gases. The radioactive emissions expend their energy in ionization and excitation of the elementary particles in the atmosphere [8]. The near ground plasma collides with the atmospheric constituents such as CO_2 , SO_X , NO_X etc leading to the generation of ions and free electrons, which quickly attach with the oxygen in a three-body reaction [2].

The free electrons attach with the metal atoms generating negative ions. The activated ions participate in ion-molecular reactions with the H_2O , which is present in large amount in troposphere. Thus H_2o in the troposphere plays a major role in the formation of long living ions [3]. Hydrated ions including radons become centers of water condensations. During this process, latent heat is released and the atmosphere gets heated up resulting in convective activity of the ions. The substantial dipole movement of the water molecule p = 1.87D, prevents these molecules from recombination. Coulomb force of attraction results in the formation of positive, negative and quasi-neutral clusters.

Intense movements in air damage the neutral clusters due to weak Coulomb force of attraction. Thus the atmosphere near ground becomes rich in long living ion clusters. The different mobility of the ion clusters results in charge separation [7]. The increase in ion hydration reduces the columnar conductivity of the air column. The above discussed charge clusters are assembled from about 4-5 m above the ground. These assembled clusters develop an electric field in surface near earth vertically [4], [5]. Thus the anomalous

^{*} Women Scientist, K L University, Vaddeswaram, A.P, India. Email: revathimouni@gmail.com

^{**} Professor, K L University, Vaddeswaram, A.P, India. Email: skrao@kluniversity.in, ksrklu1712@gmail.com and drslakshminarayana@kluniversity.in

vertical electric field acts as an electrical source, connecting the near earth surface and the upper atmosphere, leading to change in the upper atmosphere dynamo currents resulting in seismo-ionospheric perturbations.

Pulinets and Boyarchuk developed a simulation model for penetration of the anomalous vertical electric field. According to it the value of the electric field changes with height and it has, a rapid initial increase at minimum and slow decay after reaching the maximum value. The penetration of the electrical field is larger in night time than in day time [6]. The existing Lithosphere-Atmosphere-Ionosphere coupling mechanism is persistent with these changes [7].

Advancement in the technology of the Global Positioning Systems (GPS) paved a way to the study of seismo-ionosphere perturbations. The ionosphere being a dispersive medium causes delay in electromagnetic signals passing through ionosphere. Time delay is calculated by using principal of "time of arrival"

The ground based GPS receiver calculates the Slant Total Electron Content (STEC) which is defined as the integral no. of electrons present in line of sight path from satellite to receiver. The change in speed of the GPS signal travelling through ionosphere leads to the change in the signal transit time due to the changes in refractive index of medium. The pseudorange in meters for GPS receiver of single frequency, ' ρ_{L_1} ' is given by

$$\rho_{L_1} = (40.3 \times \text{STEC}) / f_{L_1}^2 \tag{1}$$

For GPS receivers with two frequencies

$$\rho_{L_1} - \rho_{L_2} = (40.3 \times \text{STEC}) \times [(1/f_1^2) - (1/f_2^2)]$$
(2)

where f_1 and f_2 corresponds to frequencies of GPS L_1 and L_2 signals. STEC for GPS receiver with two frequencies is

STEC =
$$(1/40.3) \times [(f_{L_1}^2 \times f_{L_2}^2)/(f_{L_1}^2 - f_{L_2}^2)] \times (\rho_{L_1} - \rho_{L_2})$$
 (3)

The STEC values change with the movement of the satellite. At a particular time many satellites are seen by the ground based receiver. Vertical Total Electron Content (VTEC(V)) is calculated by

$$V = STEC \times \cos(\xi) \tag{4}$$

where $\xi' = 90^{\circ}$ – satellite zenith angle at Ionospheric Pierce Point. Generally it is considered to be a height of 350 Km from surface of the earth [8]. The anomaly detection of seismo-ionospheric perturbations is carried on GPS TEC data on global scale. (GIM data, GDGPS, NASA's data)[9-11]. Global scale TEC values are taken from a group of GPS receivers.

The demerits in analyzing seismo-ionospheric perturbations using a network of ground based GPS receivers (global TEC data) are as follows. (1) The global TEC data includes modelling errors and it may not be possible to study the specific phenomena leading to the occurrence of earthquake. (2) A network of GPS stations, where all receivers are not situated in a particular geometry, estimation of TEC values for points nearer and farther distances leads to validation of the data at a specific point in the upper atmosphere. (3) The global TEC data used in the analysis has different sampling times. For example, the sampling period for EURF network situated in Italy is 2.5 minutes and Global Ionospheric Maps (GIM) data has a sampling period of 2 hours etc.

Implementation of signal processing algorithms results in accurate signal estimation. Parametric methods are helpful in identification of underlying stationary signal structure, described by using limited number of parameters. These methods are useful in detecting and tracking changes in the data set. In this paper, Autoregressive AR(4) methods are used for anomaly detection regarding earthquakes. Yule-walker, Burg, Covariance and Modified Covariance are used for the analysis. The analysis is carried out for the catastrophic event occurred on 15th January 2014 in Indonesia (6.33°S, 106.896° E) at 9:56 hours, Greenwich mean time with a depth of 125km.

2. DATA

GPS VTEC is staked by the International GNSS service (IGS). It is noticed that the VTEC of satellite 18 is perturbed on the earthquake day. The location map of the earthquake is shown in the Figure 1 taken form http://earthquaketrack.com/quakes/2014-01-15-09-26-11-utc-4-5-125 and the VTEC plot of satellite 18 is shown in Figure 2. The location map of the earthquake is taken from



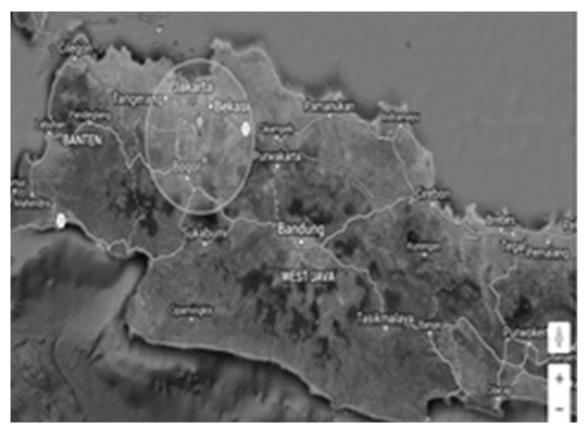


Figure 1: Location map of the earthquake

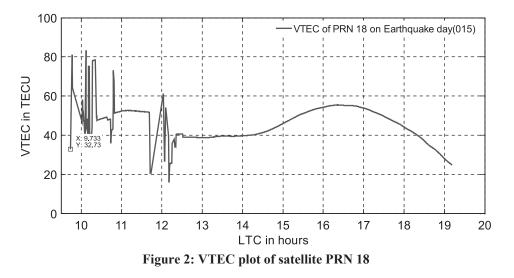


3. METHODOLOGY

Parametric methods use the knowledge of data generation in the estimation procedure. The investigation was carried out using fouth order Autoregressive (AR(4)) models[12-18].

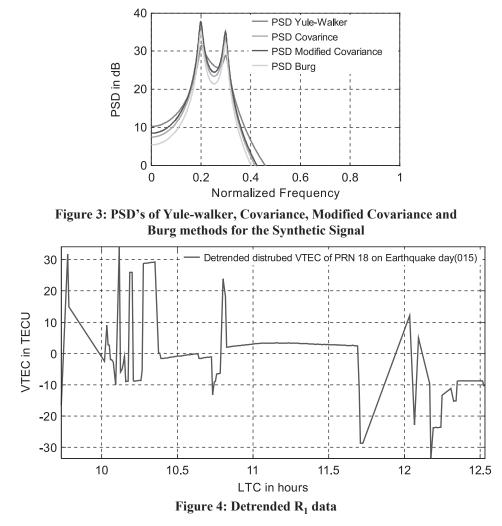

Yule-walker, Covariance, Modified covariance, Burg algorithms are synthesized and their respective normalized frequencies are 0.2002 and 0.298. Power Spectral Density (PSD) of Yule-walker is different from the remaining PSDs. It does not effectively represent the frequencies present in the data. PSDs of Covariance, Modified Covariance are scaled so as to clearly represent them in the Figure 3. Burg PSD has predominantly represented the normalized frequencies in the data. After the implementation of the algorithms

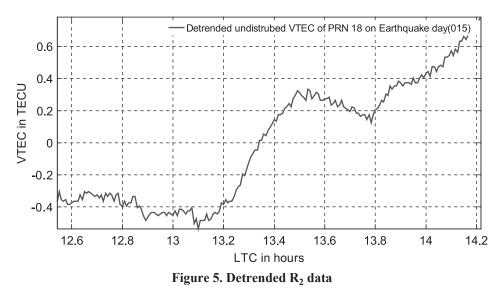


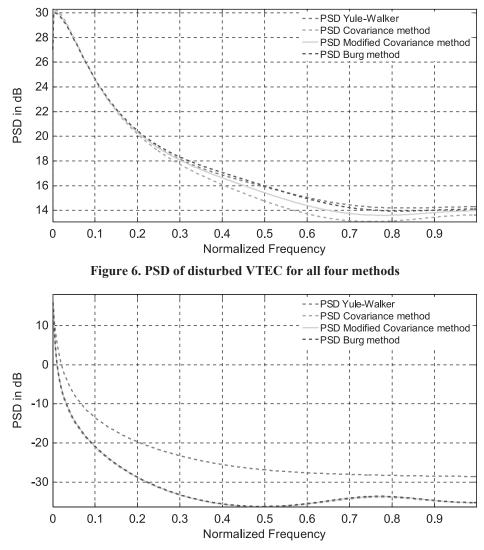


Figure 7. PSD of undisturbed VTEC for all four methods

The TEC perturbation in satellite number 18 is not available before occurrence time of the disturbance and it is divided into disturbed and undisturbed parts on the earthquake day. The diurnal and seasonal variations in VTEC are removed by detrending the data. The detrended disturbed (R_1) and undisturbed (R_2) data sets are represented in Figure 4, Figure 5.The TEC data of PRN 18 consists of 1042 points. R_1 and R_2 segments of data consist of 240 and 202 data points respectively. The methods are applied on both R_1 and R_2 sets to identify the underlying salient features of non-stationary TEC data.

It is observed that the PSD of R_1 data has significant positive value (14dB) when compared to that of the undisturbed data. PSD plots characterize the energy in the ionosphere due to impending earthquake. PSDs of above methods for both R_1 and R_2 sets are shown in Figure 6 and Figure 7. Among the four spectrum estimation methods applied on GPS VTEC, Burg method has given better results. The PSDs of R_1 and R_2 sets are given in Table 1.

The disturbed VTEC data segment is subjected to multi-resolution analysis to identify earthquake precursors. Burg algorithm is implemented on those segments of data to understand the conjuncture of earthquake on the ionosphere. The first bisection of disturbed data segment resulted in upraise of energy at normalized frequencies 0.9247 with PSD 13.98 dB in the second data segment. The PSD plot of two segments of R₁ of 120 points is shown in Figure 9.

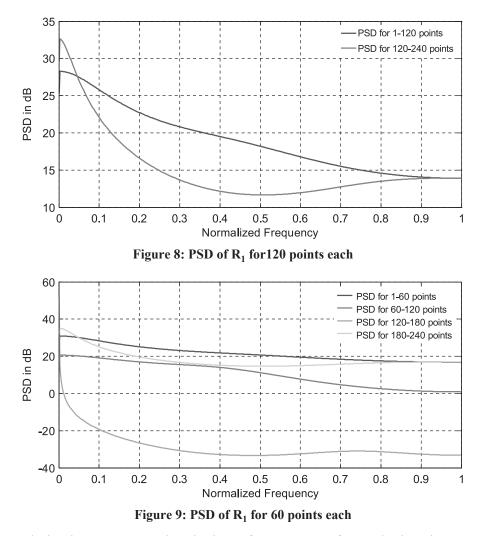

As spectral resolution increases, certainty in time of occurrence of perturbations in VTEC also increases. So R_1 is bisected into segments of 60, 30 and 15 points each. Application of Burg algorithm on second bisection of the data, resulted in a small peak in the third segment of the data. Figure 10 represents the PSD for data segments of 60 data points each. Further, R_1 is sampled into sets of 30 and 15 points to notice the clear upraise in the disturbance. In first and fourth sets of 30 points, peaks are identified at normalized frequencies of 0.2815 and 0.4066 with PSDs of 26.24 dB and 18.83 dB respectively. In the third and the second set the energy is abating.

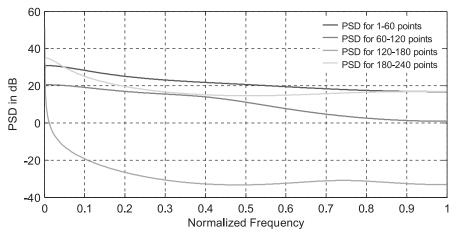


Figure 10: PSD of R₁ for 60 points each

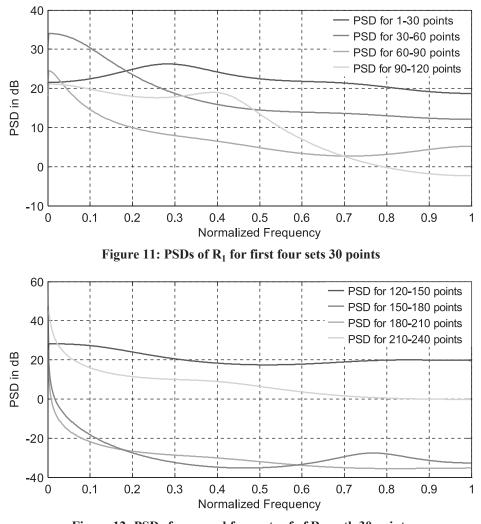


Figure 12: PSDs for second four sets of of R₁ woth 30 points

A peak is again seen in sixth set with a normalized frequency of 0.7742 with a PSD of -27.62dB.The PSDs for disturbed data sets with 30 points each are given in Figure 11 and Figure 12.

The PSDs were also drawm for data frames of 15 points each. The PSDs of data with 15 points each are shown in Figure 13 and Figure 14. It is clearly observed from the figure that first, third and fourth data sets has peaks at a normalized frequency of 0.6432, 0.2893 and 0.6197 with a PSDs of 27.03dB, 29.01dB and -28dB respectively. In fifth to eight data sets containing 15 points, it is observed in the energy has abated in the seventh set. In the eight set, a peak is observed at normalized frequency of 0.6315 with a PSD of -28.83dB. In the remaining sets of data with 15 points, each no significant change had been noticed.

Table 1			
PSD of the disturbed and undisturbed data using Yule walker,			
Covariance, Modified Covariance and Burg methods			

S.No	Method	Disturbed approx. range (dB)	Undisturbed approx. range (dB)
1	Yule walker	14.19	-28.22
2	Covariance	13.19	-28.22
3	Modified covariance	13.64	-33.64
4	Burg	13.95	-33.64

From the analysis it is clearly identified that the ionosphere is disturbed thrice at 10:13 hours LTC, 10:40 hours LTC and finally at 10:52 hours LTC. As the GPS receiver is located near to the epicenter(58Km) these perturbations may be considered to represent the impending earthquake.

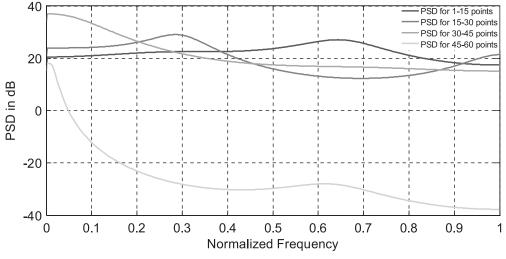


Figure 13: PSDs for first four sets of R₁ with 15 points

4. CONCLUSION

Anomalies in GPS VTEC on the earthquake day clearly show that use of Burg algorithm could recognize co-seismic disturbances in ionosphere. From the analysis, the ionosphere is disturbed thrice at 10:13 hours LTC, 10:40 hours LTC and finally at 10:52 hours LTC. According to the available literature the ionosphere is disturbed few days before the earthquake. Thorough analysis of GPS VTEC for seismo-ionospheric perturbations using spectrum estimation methods, ahead of the occurrence may lead to identification of possible precursors of earthquakes in ionosphere. In future these studies of may be used for the development of early-warning systems for earthquakes

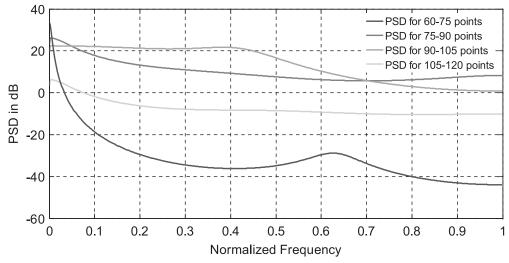


Figure 14: PSDs for second four sets of R₁ with 15 points

Acknowledgments

Author's sincere acknowledgments are given to DST, Government of India for finically funding this work under the projects SR/AS-04/WOS-A/2011 and SR/S4/AS-91/2012.

References

- Y. C. Su, et. al.," Temporal and Spatial Precursors in Ionospheric Total Electron Content of the 16 October 1999 Mw7.1 Hector Mine Earthquake", *Journal of Geophysical Research: Space Physics*, Vol. 118, 6511–6517, doi:10.1002/jgra.50586, 2013.
- 2. Sergey Pulinets, "Ionospheric Precursors of Earthquakes; Recent Advances in Theory and Practical Applications", TAO, Vol. 15, No. 3, 413-435, September 2004.
- 3. A. K. Singh, et. al., "Electrodynamical Coupling of Earth's Atmosphere and Ionosphere: An Overview", *International Journal of Geophysics Volume 2011*, Article ID 971302, 13 pages doi:10.1155/2011/971302.
- 4. Jyh-Woei Lin., "Ionospheric Total Electron Content (TEC) Anomalies Associated with Earth quakes through Karhunen-Loéve Trans form (KLT)", *Terr. Atmos. Ocean. Sci.*, Vol. 21, No. 2, 253-265, April 2010.
- 5. D.Gosh and S.K Midy, "Associating an ionospheric parameter with major earthquake occurance throughout the world", *Journal of Earth Systems and Science*, 123, No.1, Februrary, pp.63-71.
- 6. K.A. Boyarchuk, "Estimation of the Concentration of Complex Negative Ions Resulting From Radioactive Contamination of the troposphere", *Technical Physics*, Vol. 44, Number 3.
- 7. Pulinets, S. A., and K. A Boyarchuk., 2004: Ionospheric Precursors of Earthquakes, Springer Verlag Publ.
- 8. Prathap Mishra, Global Positioning Systems ,Second edition, Ganga- Jamuna Press.
- 9. O. Molchanov, et. al., "Lithosphere-Atmosphere-Ionosphere Coupling as Governing Mechanism for Pre-seismic Short Term Events in Atmosphere and Ionosphere", *Natural Hazards and Earth System Sciences* (2004) 4: 757–767.
- 10. Jyh-Woei, Lin, "Ionospheric Precursor for the 20 April, 2013, Mw = 6.6 China' Lushan Earthquake: Two-Dimensional Principal Component Analysis (2DPCA)", *German Journal OF Earth Sciences Research* (GJESR) Jyh-Woei, Lin, Vol. 1, Issue. 1, pp. 1-12, 2013.
- 11. Contadakis, M.E, et. al., "TEC Variations over the Mediterranean During the Seismic Activity Period of the Last Quarter of 2005 in the Area of Greece, Nat. Hazards Earth Sys., 8, 1267-1276.
- 12. Monson H.Hayes, "Statistical Digital Processing and Modeling," Georgia Institute of Technology, John Wiley and Sons, Inc.
- R.Revathi¹, S. Lakshminarayana², S.Koteswara Rao³, K.S.Ramesh⁴, K.Uday Kiran⁵, "Observation of Ionospheric Disturbances for Earthquakes (M>4) Occurred During June 2013 to July 2014 in Indonesia using Wavelets", Remote Sensing of the Atmosphere, Clouds, and Precipitation VI, edited by Eastwood Im, Raj Kumar, Song Yang, Proc. of SPIE Vol. 9876, 98763E · © 2016 SPIE · CCC code: 0277-786X/16/\$18 · doi: 10.1117/12.2227301
- R.Revathi¹, S. Lakshminarayana², S.Koteswara Rao³, K.S.Ramesh⁴, K.Uday Kiran⁵, "Analysis of Seismo-Ionospheric Perturbations using Modified Covariance Algorithm", Land Surface and Cryosphere Remote Sensing III, edited by Reza Khanbilvardi, Ashwagosh Ganju, A. S. Rajawat, Jing M. Chen, Proc. of SPIE Vol. 9877, 987730 · © 2016 SPIE CCC code: 0277-786X/16/\$18 · doi: 10.1117/12.2225887.
- 15. R.Revathi¹, S. Lakshminarayana², S.Koteswara Rao³, K.S.Ramesh⁴, K.Uday Kiran⁵, "Application of Maximum Entropy Method for Earthquake Signatures using GPSTEC", Multispectral, Hyperspectral, and Ultraspectral Remote Sensing Technology, Techniques and Applications VI,edited by Allen M. Larar, Prakash Chauhan, Makoto Suzuki, Jianyu Wang, Proc. of SPIE Vol. 9880, 988028 © 2016 SPIE · CCC code: 0277-786X/16/\$18 · doi: 10.1117/12.2227500
- A.V.V. Pavani*, D. Tejasri, R. Revathi, K. S. Ramesh, S. Koteswara Rao and S. Lakshminarayana, "Application of Modified Periodogram Algorithm on GPS TEC for Earthquakes", *Indian Journal of Science and Technology*, Vol. 9(17), DOI: 10.17485/ijst/2016/v9i17/93117, May 2016.
- 17. Ch. Goutham, K. Rakesh, K. S. Ramesh, R. Revathi and S. Koteswra Rao P. Chitra and V. N. Ramakrishnan, "Analysis of Seismogenic Perturbations using Bartlett Method for Earthquake Signatures on GPS TEC", *Indian Journal of Science and Technology*, Vol. 9(21), DOI: 10.17485/ijst/2016/v9i21/93115, June 2016.
- S. K. Baji, R. Revathi, S. Lakshminarayana, S. Koteswara Rao and K. S. Ramesh, "Application of Multiple Signal Classification Algorithm on GPS TEC for Earthquakes", *Indian Journal of Science and Technology*, Vol. 9(17), DOI: 10.17485/ijst/2016/v9i17/92969, May 2016.